

### **TECHNICAL DATA**

Combi-3000

Size with standard frame

Overall length
Overall width
Overall width
Overall height
In-feed chute width
In-feed height
Discharge height
Overall weight

4185 mm
2415 mm
740 mm
1500 mm
475 mm
4725kg

**Supply voltage** 

220-400 v 3 phases 50-60hz

**Motors** 

 Rollers
 2 x 7.5 kW

 Auger
 1 x 0.75 kW

 Cage
 1 x 4.00 kW

**Rollers** 

Number of rollers 20
Roller diameter 168 mm
Roller length 2000 mm
Pitch 600-500 mm
Water connection 1 x 1" BSP

Capacity

2500-9000 kg/h depending on raw material type, quality and end product

**Machine models:** 

COMBI-3000-CK CARBORUNDUM ABRASIVE + KNIFE

COMBI-3000-KK FULL KNIFE

COMBI-3000-CC FULL CARBORUNDUM ABRASIVE

COMBI-3000-SK STEEL ABRASIVE + KNIFE

COMBI-3000-SS FULL STAINLESS STEEL ABRASIVE

Because of continual improvements, strict accuracy of description and illustrations cannot be guaranteed.

#### **Oy Formit Foodprocessing Ab**

Torgvägen 2, FIN-65610 Korsholm, Finland Phone +358 6 224 1626, Fax +45 758802205 rune.sars@foodprocessing.fi • www.foodprocessing.fi



## **BIG CAPACITY KNIFE PEELING**

KNIFE PEELING without WATER for SMALL and BIG SIZED RAW MATERIAL



# From raw material to a knife-peeled surface finish in one machine


The unique and patented EKKO Combipeeler peels a clean raw material to a finished product with a knife cut surface in one machine. The combination of an abrasive peeling element and a knife peeling element on one roll gives advantages that cannot be found in any other peeling machine.

The abrasive part of the element removes/ opens the outer skin of the raw material. This part of the process grants the knife elements a long lifetime. As the hard skin of the raw material is partially removed, the knife peeling is easier.


The Combi-3000 is a rotating cage peeler (also called revolver peeler). Twenty peeling rollers form an elongated drum. A full length auger regulates the retention time of the products in the peeler. The rollers, the drum and the auger all rotate separately and their rotation speed are separately adjusted with frequency converters. The rollers and the drum are driven by flat belts insuring a low noise level.

## Both big and small products, hard and soft

The Combi-Peeler design allows the peeling of a wide range of products in the same peeler. The unique design with abrasive elements combined with knife element and adjustable speed on the rolls makes it possible to peel small potatoes and celeriac with the same machine. Also, very hard products as swede turnip or long products like carrots can be peeled.

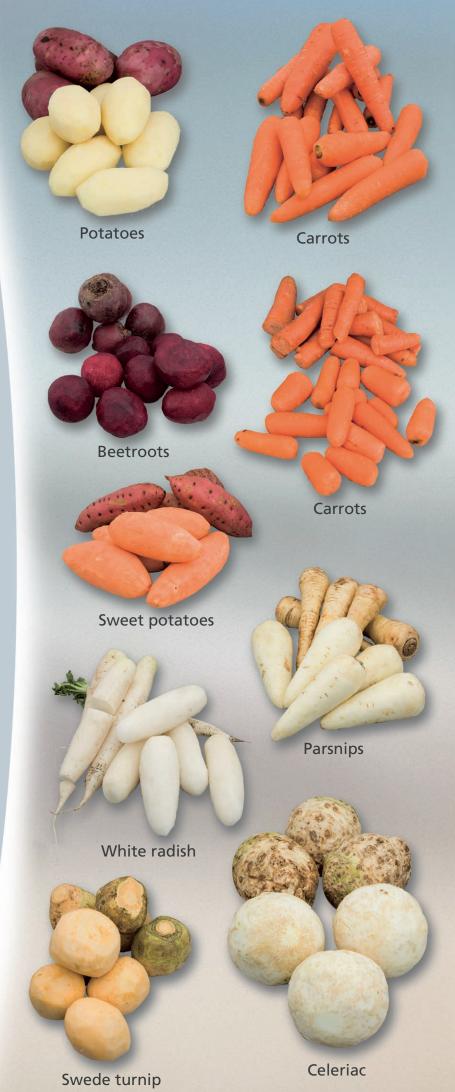


First part of the peeling element removes the outer skin and any remaining soil. Second part of the peeling element gives the knife cut surface.

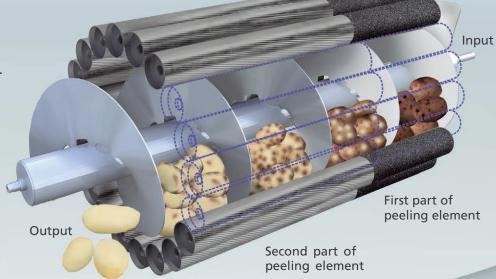

# **Element alternatives** in the Combi-peeler


1) STAINLESS STEEL
ABRASIVE+KNIFE ELEMENT
The new abrasive stainless steel
element combined with knife element
gives effective peeling without leaving
any particles from the peeling
elements in the final product.

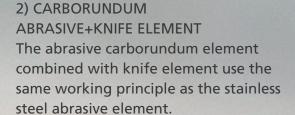

3) KNIFE+ FINISHING KNIFE
The combination of two knife
elements on one roll gives a powerful
peeling of a pre-peeled product. The
first element can be equipped with
rough cuttings and the second part
with a finer cutting knife to achieve
the best peeling results.

4) The new stainless steel abrasive roll elements for peeling of chean products.


5) ABRASIVE ELEMENTS
Carborundum abrasive roll elements
for pre-peeling of all types of
products. The roller can be gritted
with two sizes of Carborundum.




COMBI-1000KS KNIFE+STEEL ABRASIVE




COMBI-1000KC
CARBORUNDUM ABRASIVE+KNIFE



COMBI-1000KK KNIFE+KNIFE



COMBI-1000SS FULL STAINLESS STEEL ABRASIVE



COMBI-1000CC FULL CARBORUNDUM ABRASIVE